



Dimension:180x50x29mm



■ Features :

- Constant voltage design
- 180~264VAC input range
- Protections : Short circuit/Over load
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- 2 years warranty


■ Applications :

- LED strip lighting
- LED tube lighting
- LED luminous character lighting
- LED light box/cabinet

■ Description :

NPZ-150 is one economical slim 150W LED power supply series. The body is designed 29mm in height, which allows space saving inside the LED lighting boxes/cabinets. NPZ-150 is designed with metal housing that enhances the unit's power dissipation. With working efficiency up to 93%, the entire series can operate at the ambient temperature between -20°C and 50°C under air convection. It is equipped with constant current mode for over-load protection, fitting various LED applications. The complete protection functions and relevant certificates for LED lighting (IEC EN 61347-1, UL 8750) make NPZ-150 a very competitive power supply solution for LED lighting applications.

■ Model Encoding

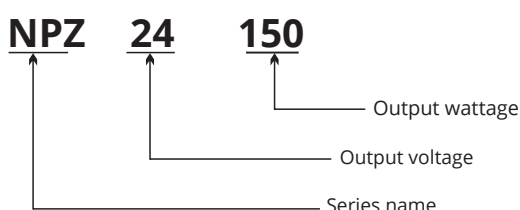


SPECIFICATION

MODEL		NPZ-12-150	NPZ-24-150	NPZ-48-150
Output	DC voltage	12V	24V	48V
	Rated current	12.5A	6.3A	3.2A
	Current range	0~12.5A	0~6.3A	0~3.2A
	Rated power	150W	151.2W	153.6W
	Ripple&noise	150mVp-p	200mVp-p	500mVp-p
	Voltage tolerance <small>Note.3</small>	±2.0%	±2.0%	±2.0%
	Line regulation <small>Note.4</small>	±0.5%	±0.5%	±0.5%
	Load regulation <small>Note.5</small>	±1.0%	±1.0%	±1.0%
	Setup,rise,hold up time	200ms,20ms,24ms/230VAC		
Input	Voltage range	180~264VAC 47~63Hz, 282~339VDC		
	Efficiency	90%	92%	93%
	AC current	1.6A/230VAC		
	Inrush current	Cold start 55A/230VAC		
	leakage current	<2mA/240VAC		
Protection	Overload	Rated output power115%~135%Start overload protection		
		Protection type:Hiccup mode,auto-recovery after fault condition is removed		
Environment	Working temp& humidity	-20°C~+50°C(Please refer to“derating curve”)20%~90%RH,Non-condensing		
	Storage temp& humidity	-40~+85°C,10~95%RH,Non-condensing		
	Temperature coefficient	±0.03%/°C(0~50°C)		
	Withstand vibration	10~500Hz,2G 10min./1Cycle,Period for 60min,Each axes		
Safety	Withstand voltage	I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC		
	Isolation resistance	I/P-O/P,I/P-FG,O/P-FG:100M Ohms/500VDC/25°C/70%RH		
Standards compliance	Safety standards	Compliance to UL 8750,IEC EN 61347-1		
	EMC emission	Compliance to EN 55015(CISPR32)Class A,EN 61000-3-2		
	EMC immunity	Compliance to EN 61547		
Others	Dimension	180*50*29mm(L*W*H)		
	Weight	0.25kg/72pcs/19kg/1.02CUFT/0.029m ³		


- Note:
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
 3. Tolerance : includes set up tolerance, line regulation and load regulation.
 4. Line regulation is measured from low line to high line at rated load.
 5. Load regulation is measured from 0% to 100% rated load
 6. The ambient temperature derating of 5°C/1000 m is needed for operating altitude greater than 2000m(6500ft)
 7. The power supply is considered as a component which will be installed into a finalequipment.The final equipment must be re-confirmed that it still meets EMC directives.For guidance on how to perform these EMC tests.

Mechanical specification


Unit:mm

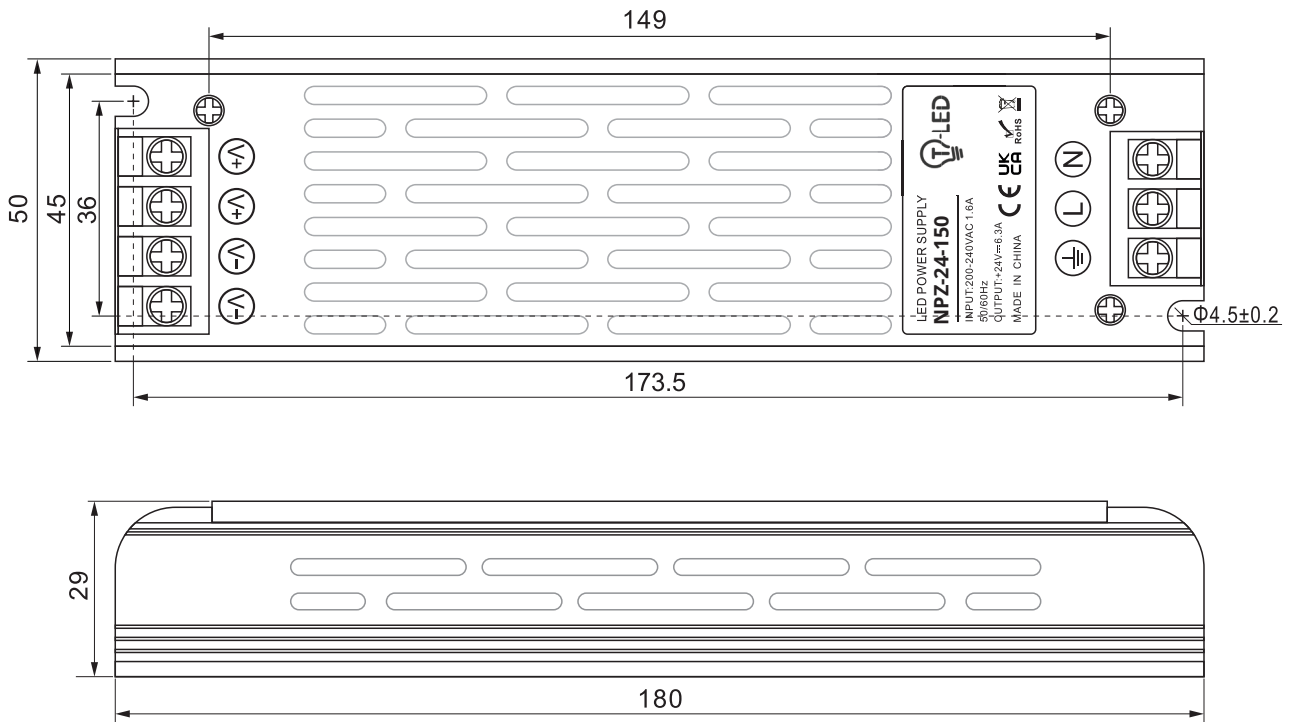

Block diagram

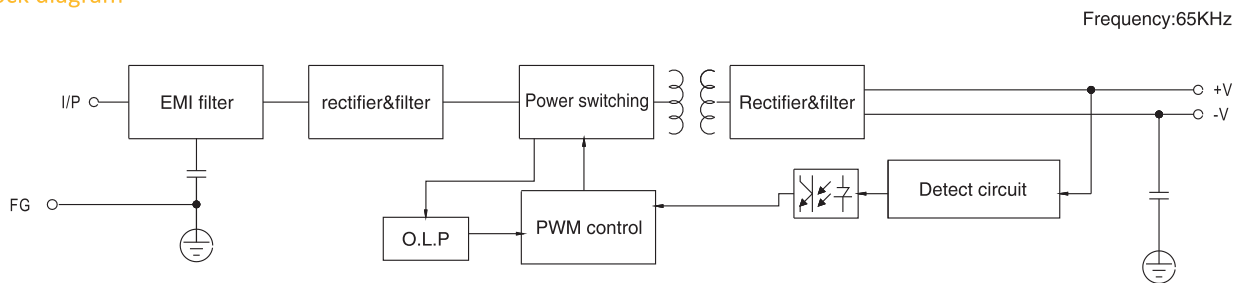

Derating curve

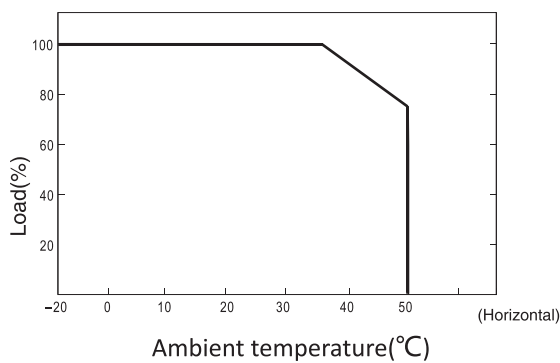

Static characteristic

