


Kod: 207127 EAN: 5905378207127

Oprawa parkowa Nolina 30W 4000K_DE

NOLINA luminaires are available in two power options: 30W and 60W. Equipped with LUMILEDS 3030 LEDs and other carefully selected and quality-tested components, they ensure reliable operation and long life, which translates into reduced maintenance and component replacement needs and costs.

NOLINA are luminaires designed for harsh weather conditions. Appropriate construction (IP66 degree of protection) and the use of high quality materials (IK08 degree of protection), such as polycarbonate diffuser and cast aluminium housing, guarantee resistance to external factors such as rain, wind or changing temperatures.

The luminaires come with a 5-year guarantee, which means that over such a long period, the investor does not have to bear the costs associated with any repairs or replacement of the lighting. This is important, especially for large projects where the costs of maintaining the lighting infrastructure can be significant. The service life of the luminaire, marked as L70B50 70 000h in practice, means that after the specified operating time, at least 50% of the LEDs in the luminaire will still be illuminated with a brightness of at least 70% of their initial value.

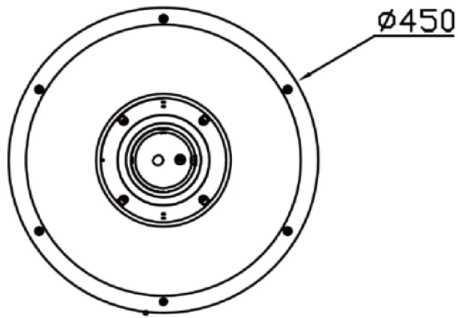

Voltage range and voltage type



Ambient temperature suitable for operation



LED type



Beam angle



IK protection rating



Lifespan


Nazwa atrybutu	Wartość
Colour of the light	
Correlated colour temperature	4000
Luminous efficacy	150
Energy efficiency class 2019/2015	C
Colour consistency in McAdam ellipses	≤6
IP protection rating	66
Warranty (years)	5
Dimmable function	No
Survival factor	0.9
Lifetime L70B50	0
Supply voltage range and voltage type	220-240V AC
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	70
CRI colour rendering index	
Colour	Black
The lumen maintenance factor	96
Lamp's diameter	
Fixture's diameter	
Beam angle	100
Motion detection range and angle	
Sensor type	
Material (cover)	polycarbonate
Material (housing)	DIE-CAST alu
LED type	SMD LED
LED quantity	

Nazwa atrybutu	Wartość
Number of on/off cycles	
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-40°C ~ +50°C
For indoor use	
IEC protection class	I
IK protection rating	08
Full box quantity	
Lamp's warm-up time to 60%	1
Width	450
Height	577
Product weight with packaging (g)	7758
Master carton weight (kg)	
EPREL ID	2 043 317
Date of first placement on the market	
Energy class	
Form of the product (EPREL)	SourceOut
Angle for useful luminous flux (EPREL)	Sphere 360 degrees
Is the product equipped with an integrated light source? (EPREL)	Yes
Non-directional or directional light source (EPREL)	NDLS
Is this product a light source? (EPREL)	
Mains or non- mains light source (EPREL)	NMLS
Connected light source (EPREL)	No
Colour-tuneable light source (EPREL)	No
R9 colour rendering index value (EPREL)	1

Not dimmable	
Compatible dimmer type	
Lifespan	
Power Factor	0,92


Total luminous flux (EPREL)	2730
On-mode power Pon (EPREL)	14
Useful luminous flux Φ_{use} (EPREL)	2730
Beam angle in degrees (EPREL)	120
Product code	

Opakowanie jednostkowe



490
490
635

Opakowanie zbiorcze



Europaleta

